

# Pavetuf

Jointing Grout



## Jointing Grout

Guide to the Use & Installation

# Jointing Grout

Designed as a flexible wall and floor grout for both external and internal applications, that can be used with under-floor heating. The fine texture provides a smooth, satin finish that is also mould and water resistant. Pavetuf Jointing Grout is suitable for use on porcelain paving and ceramic tiles.

- Internal & external use
- Rapid setting
- Water repellent
- Stain resistant

# Installation Guide

## Preparation

Allow adhesive/mortar bed to set sufficiently before applying the grout. Ensure the joints are clean, and free from dust, organic matter, or any other contamination. Any adhesive or mortar filling more than 1/3 the joint depth, should be removed. In very warm conditions or with very porous tiles / paving it is recommended to dampen the joints before grouting. Pavetuf Jointing Grout is suitable for use in joints of 1-15mm width.

## Application

- Mix powder with clean water, (approx. 750ml per 3kg bag), to a thick creamy paste using a slow speed drill and paddle, (you can use the bucket provided).
- Allow the mixed grout to stand for 2-3 minutes then remix briefly to ensure an even consistency. The mixed grout is usable for 30-40min depending on temperature. Do not add water or attempt to remix after the grout has begun to set.
- Work the grout into the joints using a grouting trowel, small squeegee or sponge to ensure a well filled and compacted joint.
- Remove the excess grout from the tile surface as grouting proceeds.
- After initial stiffening of the grout, (typically around 30min), clean the tile surface using a clean dampened sponge working diagonally across the grout lines.
- When the grout is suitably set, polish the surface with a clean dry cloth.
- Tiled and paved areas will be ready for light foot traffic after approx. 3 hours and full traffic after 24 hours.



**Black**

**Buff**

**Grey**

# Recommendations

- Use one bag at a time and mix in the bucket provided.
- Substrates must be stable and free from any movement.
- It is advisable to carry out a trial on a test area when colour is critical.
- Slight batch to batch colour variation may occur. It is recommended to always use grout from the same batch or pre-mix grout from different batches before use.
- Setting and drying times are affected by site temperatures and conditions - Do not use under 5°C.
- Grout residue remaining on the surface of the tile after hardening may need to be removed with Pavetuf Deep Cleaner. This should be carried out with care after 24 hours and the joints pre-wetted.
- Swimming pools should not be filled for 3 weeks after grouting.

# General Information

- Suitable for driveway use and trafficking, up to the weight of 4x4's / Light vans.
- Over watering your mix, may result in shade variations and/or efflorescence.

# Coverage

Coverage is dependent on the size of the tile and joint. As an example, with a 600 x 600 x 20mm tile and 5mm joint, a 3kg bag of Pavetuf Jointing Grout will cover approximately 7.5m<sup>2</sup>

# Storage

12 months when stored in unopened bags in dry conditions.

# Health & Safety

**Please ensure that appropriate PPE is used when preparing, mixing and applying this product.**

Biocidal Content: 2-octyl-2H-isothiazol-3-one.

Consult Safety Data Sheet before use.

Pavetuf Jointing Grout does not contain Portland cement, but may be slightly alkaline in contact with water, sweat etc.

Avoid prolonged contact with skin.

Wear gloves and avoid contact with eyes.

Keep out of reach of children.

Wash skin with soap and water after contact.

This grout contains a biocide to protect the dried surface from fungal growth.

**Before use, please read the safety data sheet available at [www.pavetuf.com](http://www.pavetuf.com)**

**NOTE:** The above notes are intended as a guide only and professional advice should be obtained before work is commissioned. Talasey accepts no responsibility for any damage or loss as a result of using the information in these guidelines.

It is your responsibility to ensure that you comply with all applicable health and safety legislation and guidelines.

**[www.pavetuf.com](http://www.pavetuf.com)**

For further information or technical advice call  
**0330 333 8030**

Distributed by Talasey Ltd  
**[www.talasey.co.uk](http://www.talasey.co.uk)**

# Pavetuf Sealers & Cleaners



Features										Use on these materials						Look	
Environmentally friendly	Colour Enhancing	Waterproofing	Breathable	Superior stain resistance	Stain resistance	Superior scrub rate	UV stable	Use straight after installation	Black slates, granites & limestones	State & limestone	All other natural porous products & stone	Masonry	Brickwork	Concrete paving	Tarmac	Invisible finish	Satin finish
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓
✓	✓	✓	✓	✓	✓	✓		✓	✓						✓		

**Invisible:** Easy to apply, invisible sealer for long lasting protection. Available in a 1ltr and 5ltr tub.

**Satin:** Easy to apply sealer, for long lasting protection with a satin finish. Available in a 1ltr and 5ltr tub.

**Invisible Ultra:** Professional deep penetrating invisible sealer giving the highest level of protection and superior stain resistance. Available in a 1ltr and 2.5ltr tub.

**Satin Ultra:** Professional deep penetrating satin sealer giving the highest level of protection and long lasting stain resistance. Available in a 1ltr and 2.5ltr tub.

**Back to Black:** A colour reviving sealer to restore black stones and granites. Available in a 1ltr and 5ltr tub.



The Ultra product options provide our highest level of sealant protection, with superior stain repellent properties that allow for a longer period of time before any spillages will soak into and stain the paving. This gives Homeowners more time before they need to clean any spillages.




	Stains that each cleaner removes												Size options		
	Algae, moss, mildew, fungi	Black & white spot lichens	Heavy soiling	Light soiling	Grease & oil*	Leaf & plant staining	Bird droppings	Efflorescence/salts	Rust/iron ore	Solvent sealers paints/varnish	Mud	Atmospheric pollution	BBQ grease, oily food stains*	1 litre	5 litre
<b>Deep Cleaner*</b> : A deep penetrating cleaner for the easy removal of heavy soiling from all hard landscaping areas.			✓	✓	✓		✓				✓	✓	✓	✓	✓
<b>Resin Bound Cleaner</b> : A powerful heavy duty cleaner for resin bound aggregate surfaces.			✓	✓	✓		✓				✓	✓	✓	✓	✓
<b>Green Off Cleaner</b> : For the removal of algae, moss, leaf staining and organic growths from all hard landscaping areas.	✓		✓	✓		✓	✓				✓	✓		✓	✓
<b>Wood Deck Cleaner</b> : Effective for the removal of organic growths and staining from wooden decking.	✓		✓	✓		✓	✓				✓	✓		✓	✓
<b>UPVC &amp; Fascia Cleaner</b> : An effective UPVC cleaner for the removal of organic growths and staining.	✓		✓	✓		✓	✓				✓	✓		✓	✓
<b>Wall &amp; Render Cleaner</b> : A non-corrosive cleaner for the removal of organic growths and staining for brick and rendered walls.	✓		✓	✓		✓	✓				✓	✓		✓	✓
<b>Composite Cleaner</b> : A concentrated acid free cleaner for use on composite decking, fencing and doors.			✓	✓			✓				✓	✓		✓	✓
<b>General Cleaner*</b> : A general cleaner for regular maintenance on all hard landscaping areas.				✓			✓				✓	✓		✓	✓
<b>Rust Remover</b> : An effective, non-corrosive rust stain remover for hard landscaping products.								✓						✓	
<b>Salt Eraser</b> : For the removal of efflorescence/salt from the surfaces of paths, drives and patios.							✓							✓	✓
<b>Porcelain Cleaner*</b> : A concentrated porcelain and ceramic cleaner for internal and external use.				✓			✓				✓	✓		✓	✓
<b>Sealer Remover</b> : Easy to use sealer remover for use on solvent and polymer based sealers, paints and varnishes.									✓					✓	✓

\*Can be used internally as well as externally

# TOTALLY TALASEY

TALASEY ARE PROUD TO BRING YOU THEIR EXTENSIVE PORTFOLIO OF THE FINEST LANDSCAPING PRODUCTS AND SOLUTIONS

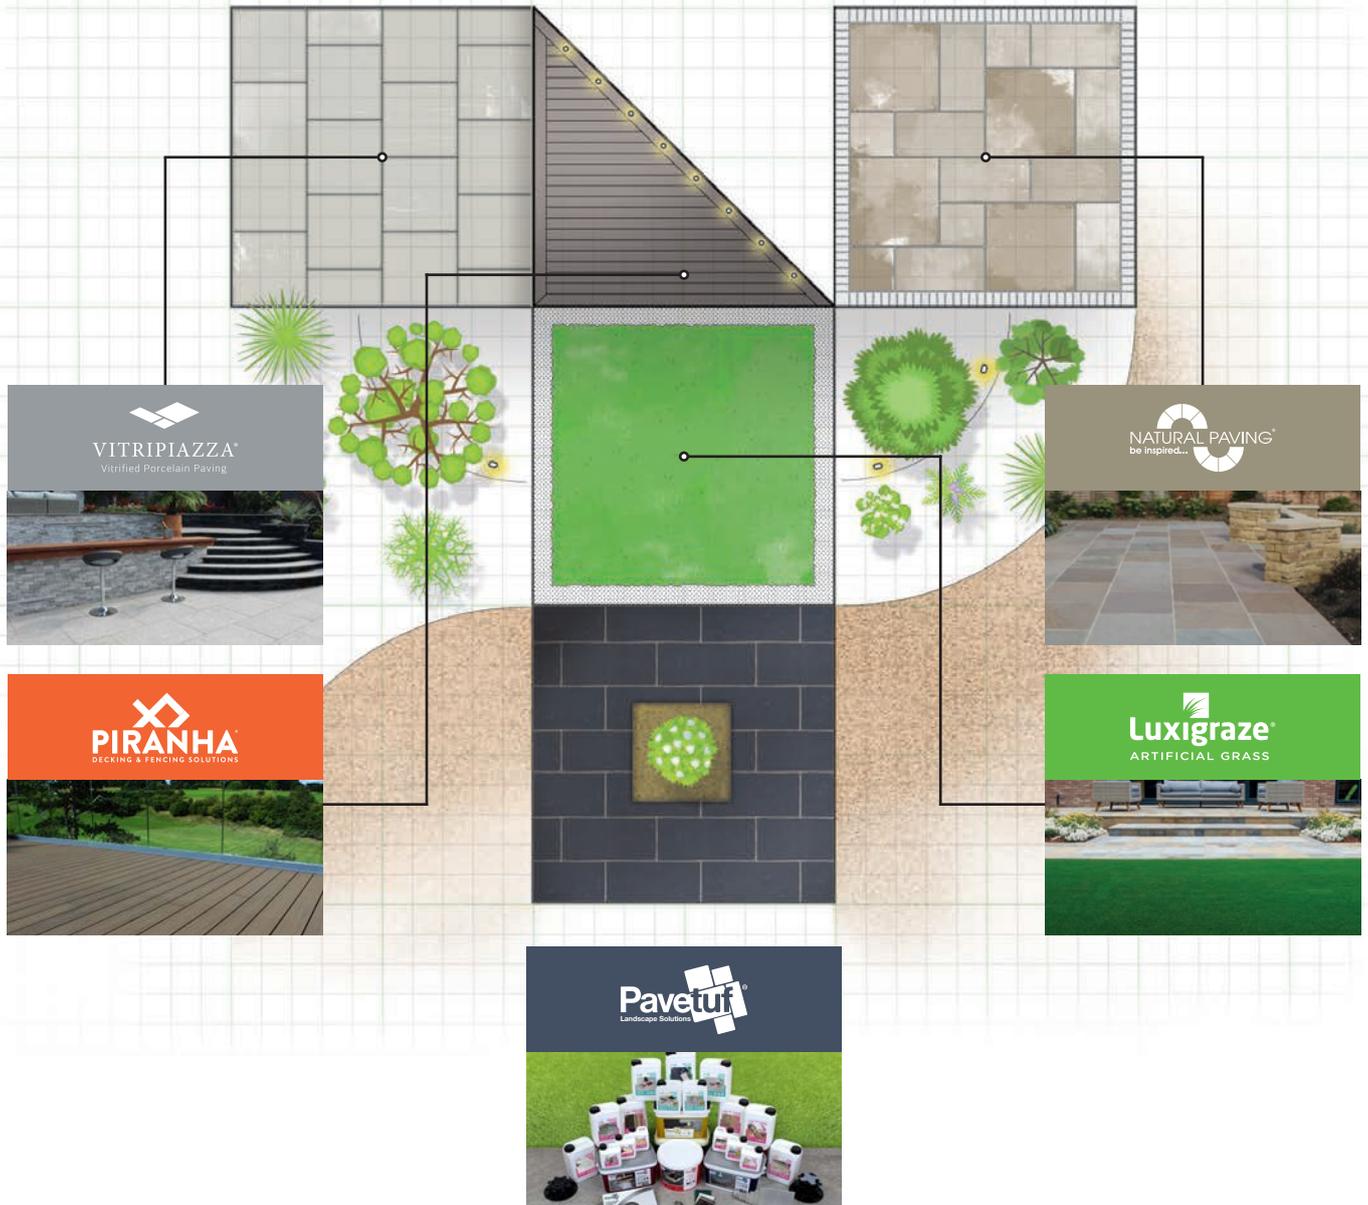

Legal Notice - The information in this Document or on Talasey Ltd's Website referred to herein (the "Materials") is for guidance purposes and intended to assist you in your purchase and enjoyment of the product. Talasey Ltd will have no responsibility or liability, howsoever arising, for reliance on the information provided in the Materials. Talasey Ltd's sole liability in respect of any products shall be as outlined in the terms and conditions of purchase or in any express guarantee relating to the product purchased. Any product guarantee referenced in the Materials is subject to terms and conditions. Whilst we work closely with our partners, any arrangement you make or advice you take from them will be subject to your contract with them and Talasey Ltd has no liability in respect of any act or omission of any third party. Every effort has been taken to ensure that the information contained in the Materials is accurate, specifications and tolerances will be as contained in your order for the products, and may differ from those stated in the Materials, particularly with respect to natural materials where colours may differ from those illustrated. Guidance provided by Talasey Ltd is generic and advice should be sought in respect of local environmental and building regulations as applicable.



See website for terms & conditions  
info@talasey.co.uk  
0330 333 8030  
www.talasey.co.uk



**TALASEY**  
GROUP